FENDT

CARAVAN 2026



APERO • BIANCO • TENDENZA • DIAMANT

www.fendt-caravan.com

QUALITY IS OUR STYLE

Comfortable and optimally equipped on the road, Fendt caravans feel at home anywhere.











CONTENTS

04 **APERO**

Experience a trendy lifestyle

16 **BIANCO**

A wide selection to feel great in

30 **TENDENZA**

Modern trendsetter on the go

42 **DIAMANT**

Unique in every way

54 The exterior design

58 Standard equipment of outdoor area

60 Overview of beds

62 The interior details

70 Information on vehicle weights and weight-related details


72 Dimensions and weights of all series

75 Explanation of symbols





APERO

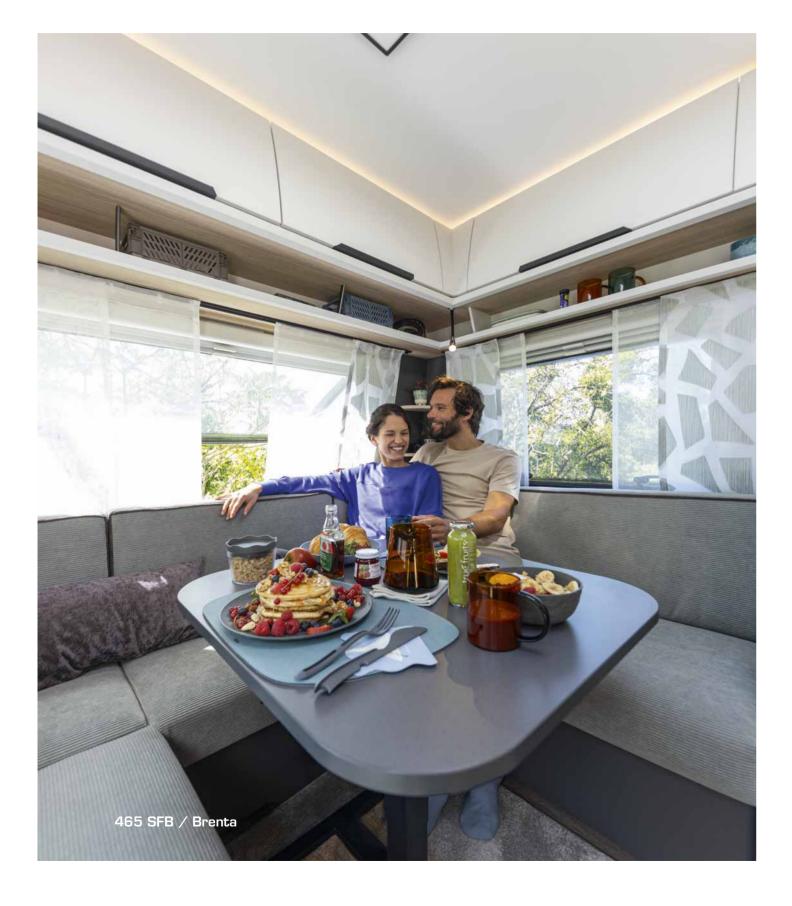










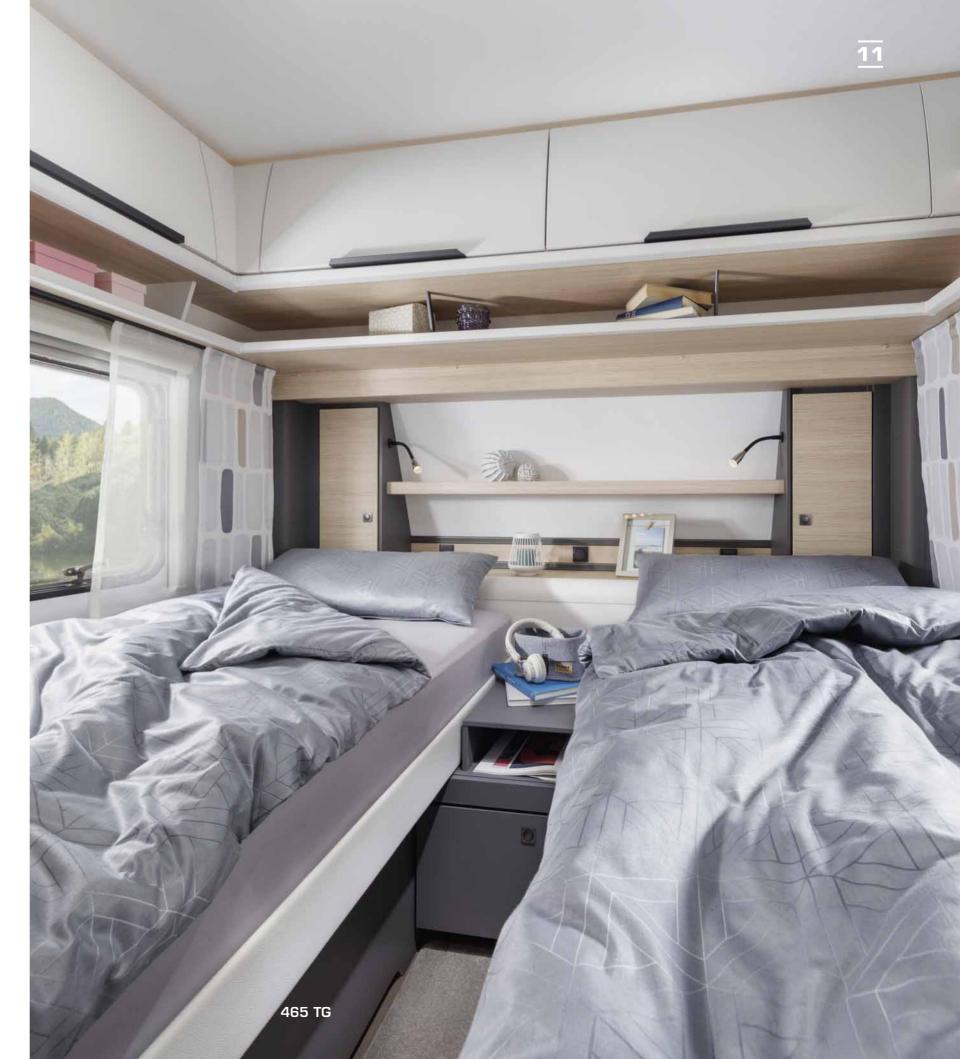

The Apero standard equipment

Living room/sleeping area

- Furniture in "Norfolk decor"
- "Brenta" or "Pino" upholstery variants
- LED lighting
- Ceiling lamp (LED/12 V) with 1 circuit
- Folding sliding door *
- Clothes rack in the sleeping area*
- Lifting table with locking lever in the round suite of seats*
- Indirect lighting (LED)
- Slatted frames with fully flexible and permanently elastic bridged joints and hardness adjustment (single and double beds)
- Reading spotlights (12 V) in the round seating suite, dimmable*
- Reading spotlights (12 V) in the sleeping area, dimmable
- Lift-O-Mat (single and double beds)
- Mattresses: interior-sprung (single and double beds)
- MINI/MIDI roof hood (Dometic) with crank, forced ventilation, integrated blackout pleated blind and roller fly screen
- Ergonomically shaped back padding
- High-density seat upholstery
- Ventilated storage compartments with indirect ceiling lighting (LED)
- Carpet in the door sill with the Fendt-Caravan logo
- Vinyl flooring, hard-wearing, easy to care for
- Winter backrests

Kitchen/bathroom

- Waste collector integrated into the entrance door *
- Workplace lighting (LED)
- Bathroom lighting (LED/12 V)
- Cutlery inserts with a soft-touch surface
- Shower cubicle*
- Towel/clothes hooks and toilet paper holder*
- Cooker (3-burner) with ignition fuse, automatic ignition, matt-enamelled cooking grate, glass cover, and separate stainless steel sink with glass cover
- Comfort pleated roller blind on the kitchen window *
- Kitchens with large drawers*
- Absorption refrigerator (98 I when freezer compartment is removed), with interior lighting*
- Absorption refrigerator (133 I when freezer compartment is removed), slim tower, that can be opened from both sides, with interior lighting*
- Kitchen mixer tap made of plastic
- Central washrooms* with large wall units, generous shelves under the sink and an illuminated mirror
- Mirror cabinet in the open bathroom*
- Flush toilet with diode level indicator and holding tank (rollable)*
- Kitchen storage compartments with soft-close hinges
- Washbasin in white with shelves, bathroom cabinet and illuminated mirror
- Washroom window, hinged, made of frosted glass with blackout roller blind and roller fly screen

Water

- Mobile waste water tank (24 L)
- Fresh water (fixed tank 10 d)/25 e) litres) with external filling*
- Fresh water (fixed tank 10 d)/45 e) litres) with external filling*
- Fresh water level indicator
- Truma-Therme 230 V water heating with mixer tap*

Multimedia

• TV cabling (230 V socket

Technology / heating / air conditioning

- Truma S 3004 gas heater with automatic ignition*
- Smoke detector
- Switch on the entrance door for the ceiling light and awning light
- Switching power supply 350 W
- Fuse box (230 V) with residual current device (safety switch)
- Spotlight(s) (LED/12 V)
- 230 V sockets
- USB-C double socket(s)
- Warm air system with fan (1 x 12 V)*

Additional standard fittings for the APERO ACTIV

- Truma Combi 4* or Combi 6* gas heaters with CP plus digital control panel with air circulation and integrated hot water boiler (10 I capacity)
- Compressor refrigerator (98 I when freezer compartment is removed), that can be opened from both sides, with interior lighting*
- Compressor refrigerator (157 I when freezer compartment is removed), slim tower, that can be opened from both sides, with interior lighting*












^{*} certain models only


For an explanation of the symbols, see page 75

¹⁴ APERO



				403 31 0	
		Total length	cm	703	
		Total width	cm	232	
	Sle	eeping spaces		4	
	Technically permitt	ed total mass	kg	1500 g)	
	Mass in running o	rder (-/+ 5%)	kg c)	1286 (1222-1350)	
Optional increa	s techn. poss.	kg	1600/1700/1800		

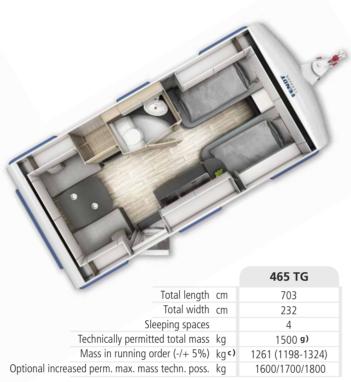

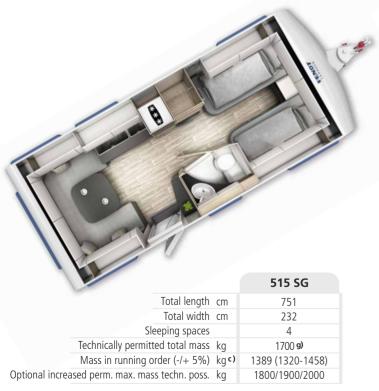

Layouts and dimensions

Information on vehicle weights and weight-related details on pages 70 and 71 Dimensions and weights of all model ranges and models from page 72 Explanation of the symbols on page 75




Scan QR code to watch a film about the Apero

15



				433 31 B
	Total le	ngth	cm	722
	Total v	vidth	cm	232
	Sleeping sp	aces		4
	Technically permitted total r	mass	kg	1600 g)
	Mass in running order (-/+	5%)	kg c)	1354 (1286-1422)
Optional inc	reased perm. max. mass techn.	poss.	kg	1700/1800/1900/2000



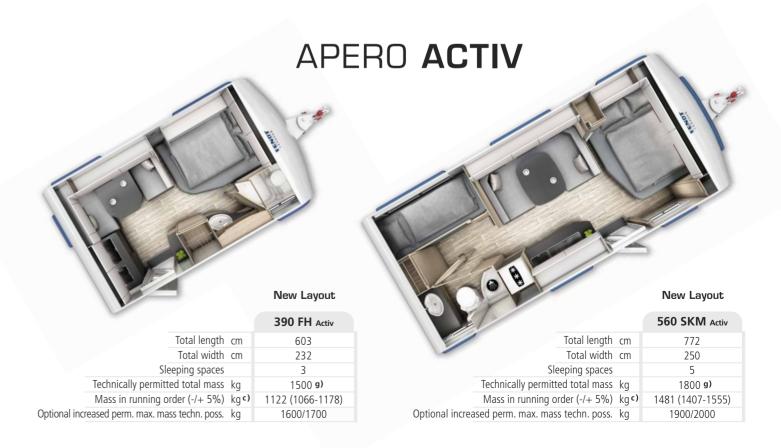

A wide selection to feel great in





ACTIV 550 KMG / Savio


ACTIV 495 SFE / Pineto

BIANCO



SELECTION 515 SKM

BIANCO

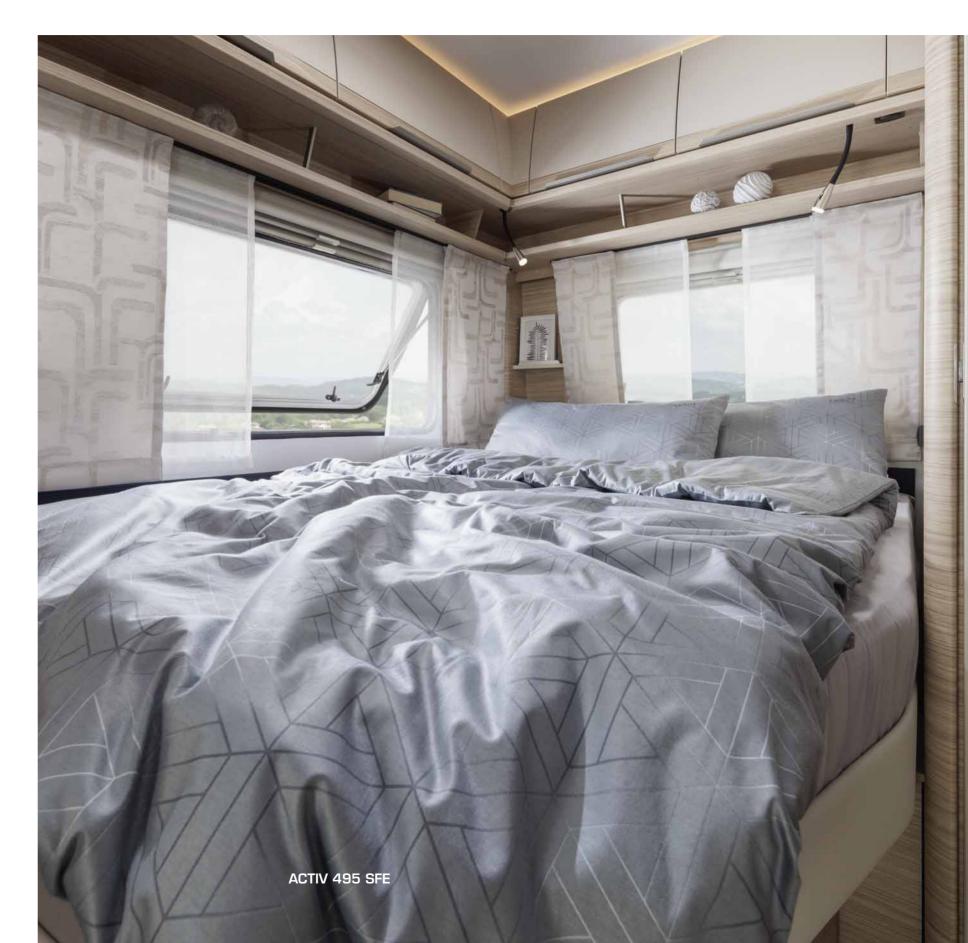





The Bianco standard equipment

Living room/sleeping area

- Furniture in "Salvador Oak decor"
- "Pineto" or "Savio" upholstery variants
- LED lighting
- Ceiling lamp (LED/12 V) with 2 circuits
- Folding sliding door*
- Clothes rack in the sleeping area*
- Lifting table with locking lever in the round suite of seats*
- Indirect lighting (LED)
- Slatted bed base with fully flexible and permanently elastic bridged ioints and hardness adjustment (single and double beds)
- Reading spotlights (12 V) in the round seating suite, dimmable*
- Reading spotlights (12 V) in the sleeping area, dimmable
- Lift-O-Mat (single and double beds)
- Mattresses: interior-sprung (single and double beds)*
- MINI/MIDI roof hood (Dometic) with crank, forced ventilation, integrated blackout pleated blind and roller fly screen *
- Ergonomically shaped back padding
- High-density seat upholstery
- Ventilated storage compartments with indirect ceiling lighting (LED)
- Carpet in the door sill with the Fendt-Caravan logo
- Vinyl flooring, hard-wearing, easy to care for
- Winter backrests

Kitchen/bathroom

- Waste collector integrated into the entrance door*
- Workplace lighting (LED)
- Bathroom lighting (LED/12 V)
- Cutlery inserts with a soft-touch surface
- Shower cubicle*
- Towel/clothes hooks and toilet paper holder*
- Cooker (3-burner) with ignition fuse, automatic ignition, matt-enamelled cooking grate, glass cover, and separate stainless steel sink with glass cover
- Comfort pleated roller blind on the kitchen window*
- Kitchens with large drawer*
- Absorption refrigerator (98 I when freezer compartment is removed), with interior lighting*
- Absorption refrigerator (133 I when freezer compartment is removed), slim tower, that can be opened from both sides, with interior lighting*
- Brass mixer tap
- Central washrooms* with large wall units, generous shelves under the sink and an illuminated mirror
- Mirror cabinet in the open bathroom*
- Stainless steel sink with glass cover
- $\bullet\,$ Flush toilet with diode level indicator and holding tank (rollable)*
- Kitchen storage compartments with soft-close hinges
- Washbasin in white with shelves, bathroom cabinet and illuminated mirror
- Washroom window, hinged, made of frosted glass with blackout roller blind and roller fly screen

Water

- Mobile waste water tank (24 L)
- Fresh water (fixed tank 10 d/25 el litres) with external filling*
- Fresh water (fixed tank 10 d/45 e) litres) with external filling*
- Fresh water level indicator
- Truma-Therme 230 V water heating with mixer tap*

Multimedia

• TV cabling (230 V socket)

Technology / heating / air conditioning

- Truma S 3004 or S 5004 gas heaters with automatic ignition (Bianco Selection)*
- Smoke detector
- Switch on the entrance door for the ceiling light and awning light
- Switching power supply 350 W
- Fuse box (230 V) with residual current device (safety switch)
- Spotlight(s) (LED/12 V)
- 230 V sockets
- USB-C double socket(s)
- Warm air system with fan (1 x 12 V) (Bianco Selection)

Additional standard fittings for the BIANCO ACTIV

- Truma Combi 4* or Combi 6* gas heaters with CP plus digital control panel with air circulation and integrated hot water boiler (10-litre capacity)
- Compressor refrigerator (157 I when freezer compartment is removed), slim tower, that can be opened from both sides, with interior lighting*
- Lateral loading feature (with separate beds and Bianco Activ 515 SKF)
- Increased load capacity due to reinforced chassis

For an explanation of the symbols, see page 75











^{*} certain models only

Layouts and dimensions

Information on vehicle weights and weight-related details on pages 70 and 71 Dimensions and weights of all model ranges and models from page 72 Explanation of the symbols on page 75



Scan QR code to watch a film about the Bianco


27









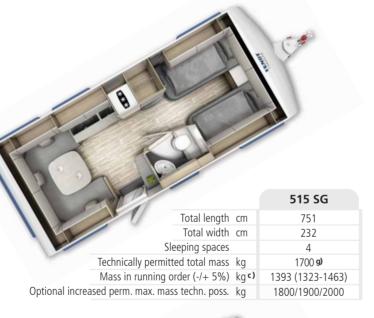







				330 1113	
		Total length	cm	603	
		Total width	cm	232	
	SI	eeping spaces		3	
	Technically permit	ted total mass	kg	1500 g)	
	Mass in running of	order (-/+ 5%)	kg c)	1150 (1093-1208)	
		ss techn. poss.	kg	1600/1700	





			465 SFH
	Total length	cm	703
	Total width	cm	232
	Sleeping spaces		3
	Technically permitted total mass	kg	1600 g)
	Mass in running order (-/+ 5%)	kg c)	1355 (1287-1423)
Optional increa	sed perm. max. mass techn. poss.	kg	1700/1800



	Total length	cm	703
	Total width	cm	232
	Sleeping spaces		2
	Technically permitted total mass	kg	1600 g)
	Mass in running order (-/+ 5%)	kg c)	1342 (1275-1409)
ptional increa	ased perm. max. mass techn. poss.	kg	1700/1800

BIANCO

Layouts and dimensions

Information on vehicle weights and weight-related details on pages 70 and 71 Dimensions and weights of all model ranges and models from page 72 Explanation of the symbols on page 75



ACTIV

Scan QR code to watch a film about the Bianco

ACTIV





Total length cm 751 Total width cm 232 Sleeping spaces 4

Technically permitted total mass kg

Optional increased perm. max. mass techn. poss. kg

Mass in running order (-/+ 5%) kg c) 1401 (1331-1471)





			330 KIVIG
	Total length	cm	772
	Total width	cm	232
	Sleeping spaces		5
	Technically permitted total mass	kg	1800 g)
	Mass in running order (-/+ 5%)	kg c)	1472 (1398-1546)
Optional incre	ased perm. max. mass techn. poss	kg	1900/2000



Optional increased perm. max. mass techn. poss. kg

Mass in running order (-/+ 5%) kg c) 1452 (1379-1525)

1800/1900/2000



Mass in running order (-/+ 5%) kg c) 1500 (1425-1575)

1900/2000

Optional increased perm. max. mass techn. poss. kg

1700 g)

1800/1900/2000


TENDENZA

Modern trendsetter on the go





TENDENZA

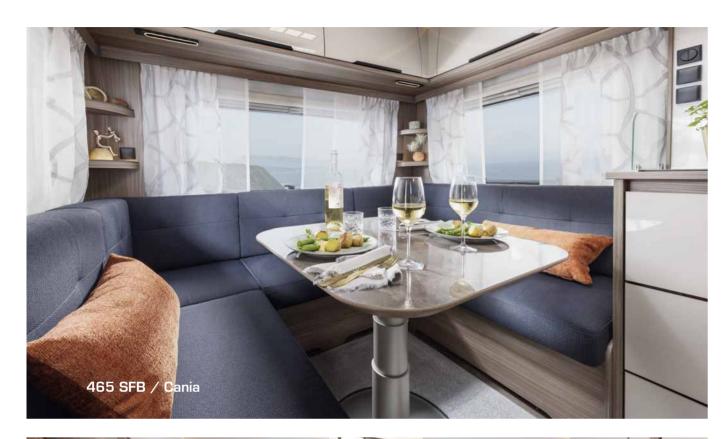






TENDENZA





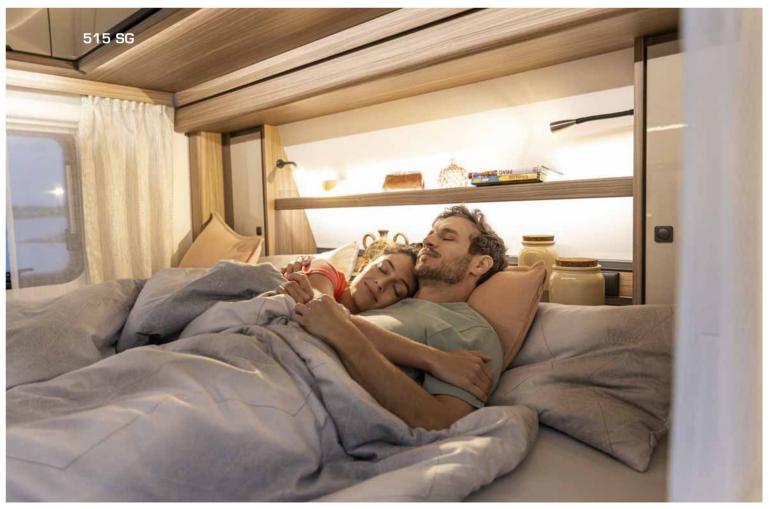

The Tendenza standard equipment

Living room/sleeping area

- Furniture in "Noce Marche" decor
- "Cania" or the "studio line Pamplona" as upholstery variants
- Lighting in the wardrobe with motion sensor and charging cable
- LED lighting
- Ceiling lamp (LED/12 V) with 2 circuits, dimmable
- Single-leg lifting table in the round seating suite
- Folding sliding door
- Fly-screen door in the entrance area
- Clothes rack in the sleeping area
- Indirect lighting (LED) on the roof storage compartments, above and below
- Slatted bed base with fully flexible and permanently elastic bridged joints and hardness adjustment (single and double beds)
- Reading spotlights (12 V) in the round seating suite
- Reading spotlights (12 V) in the sleeping area, dimmable
- Lift-O-Mat (single and double beds)
- Mattresses: comfort foam (7 zones) (single and double beds)
- MIDI roof hood (Dometic) with crank, forced ventilation, integrated blackout pleated blind and roller fly screen
- Ergonomically shaped back padding*
- Lounge-style back padding*
- High-density seat upholstery
- Ventilated storage compartments with indirect ceiling lighting (LED)
- Storage compartments with soft-close hinges
- Carpet in the door sill with the Fendt-Caravan logo
- Carpeted floor, bound at the edge and loosely laid
- Vinyl flooring, hard-wearing, easy to care for
- Winter backrests

Kitchen/bathroom

- Waste collector integrated into the entrance door
- Workplace lighting (LED)
- Oven with grill (gas)**
- Bathroom lighting (LED/12 V)
- Cutlery inserts with a soft-touch surface
- Shower cubicle*
- Towel/clothes hooks and toilet paper holder
- Stove with safety pilot and automatic ignition (3-burner)**
- Stove (3-burner) with safety pilot, automatic ignition, matt, enamelled stove grate, glass cover and separate sink with glass cover*
- Comfort pleated roller blind on the kitchen window
- Kitchens with large drawers
- Kitchen rear wall panelling
- Compressor refrigerator (157 I when freezer compartment is removed), slim tower, that can be opened from both sides, with interior lighting*
- Compressor refrigerator (200 I when freezer compartment is removed), that can be opened from both sides, with interior lighting**

- Brass kitchen mixer tap*
- Central washrooms* with large wall units with illuminated mirror doors, generous shelves under the sink
- Mirror cabinet in the open bathroom*
- Stainless steel sink with glass cover*
- Flush toilet with diode level indicator and holding tank (rollable)*
- Kitchen storage compartments with soft-close hinges*
- USB-C double socket in the kitchen
- Washbasin with a sanitary acrylic design including shelves, bathroom cabinet and lighted mirror*
- Washbasin in stainless steel** with shelves, bathroom cabinet and illuminated mirror
- Washroom window, hinged, made of frosted glass with blackout roller blind and roller fly screen

Water

- Mobile waste water tank (24 L)
- Fresh water (fixed tank 10 d/25 el litres) with external filling*
- Fresh water (fixed tank 10 d)/45 el litres) with external filling*
- Fresh water level indicator

Multimedia

• TV cabling (230 V socket)

Technology / heating / air conditioning

- Truma Combi 4* or Combi 6* gas heaters with CP plus digital control panel with air circulation and integrated hot water boiler (10 I capacity)
- Hot water heating and hot water floor heating (Alde)***
- Fendt-CaravanCONNECT with app control
- Central display above the entrance door
- Smoke detector
- Switch on the entrance door for the ceiling light and awning light
- Switching power supply 350 W
- Fuse box (230 V) with residual current device (safety switch)
- Spotlight(s) (LED/12 V)
- 230 V sockets
- USB-C double socket(s)

For an explanation of the symbols, see page 75

TENDENZA









^{*} certain models only ** for 650 SFD

^{***} for 560 SFDW

Layouts and dimensions

Explanation of the symbols on page 75

Information on vehicle weights and weight-related details on pages 70 and 71

Dimensions and weights of all model ranges and models from page 72

Scan QR code to watch a film about the Tendenza

41







			465 SFB
	Total length	cm	703
	Total width	cm	232
	Sleeping spaces		4
	Technically permitted total mass	kg	1500 g)
	Mass in running order (-/+ 5%)	kg c)	1307 (1242-1372)
Optional increased perm. max. mass techn. poss.			1600/1700/1800







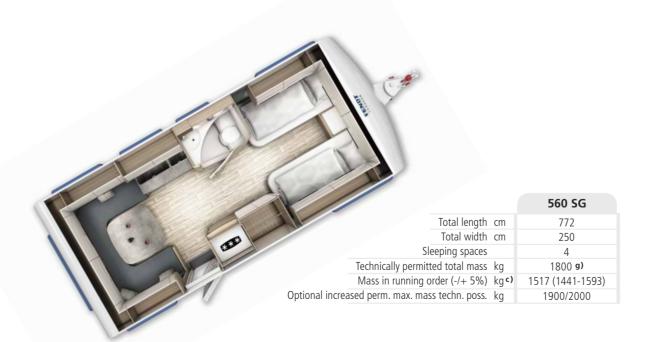

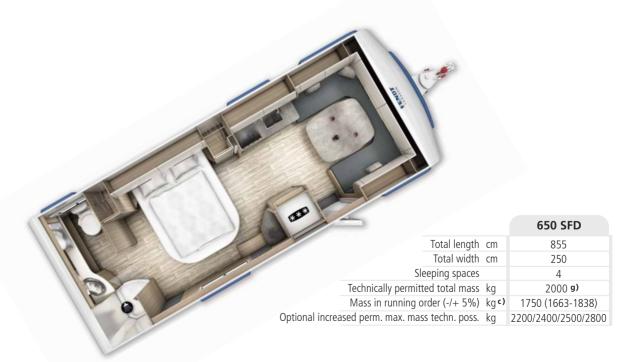


DIAMANT

Unique in every way





DIAMANT

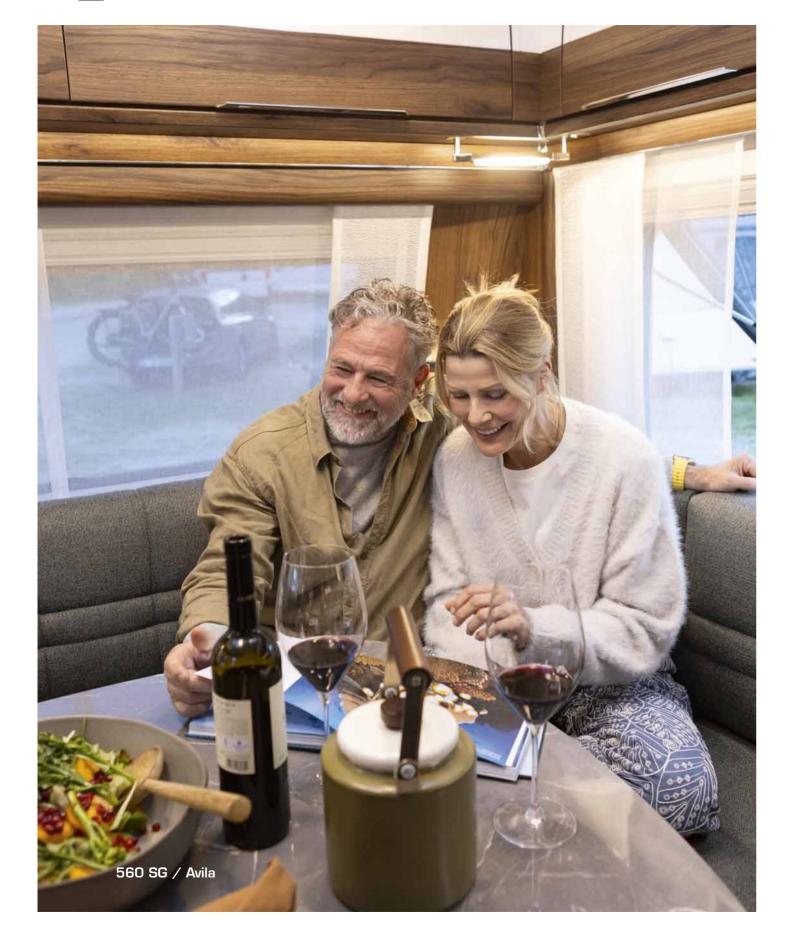





560 FD



DIAMANT



The Diamant standard equipment

Living room/sleeping area

- Furniture in "Catania Oak" decor
- "Avila" or "Genève" upholstery variants
- Lighting in the wardrobe with motion sensor and charging cable
- LED lighting
- 2 cushions
- Single-leg lifting table in the round seating suite
- Folding sliding door*
- Fly-screen door in the entrance area
- Clothes rack in the sleeping area
- Wooden sliding door*
- Indirect lighting (LED) on the roof storage compartments, above and below
- Slatted bed base with fully flexible and permanently elastic bridged joints and hardness adjustment (single and French beds)
- Reading spotlights (12 V) in the round seating suite
- Reading spotlights (12 V) in the sleeping area
- Lift-O-Mat (single and double beds)
- Mattresses: climate-controlled comfort foam (7 zones) (single/double beds)
- MIDI roof hood (Dometic) with crank, forced ventilation, integrated blackout pleated blind and roller fly screen integrated in a Skylight panoramic roof hood
- Skylight panoramic roof hood with lighting (LED)
- Ergonomically shaped back padding
- Seat upholstery with sprung interior in comfort quality
- High-density seat upholstery
- Soft roller blinds with pleated fabric (blackout roller blind from below)
- Ventilated storage compartments with indirect ceiling lighting (LED)
- Storage compartments with soft-close hinges
- Carpet in the door sill with the Fendt-Caravan logo
- Carpeted floor, bound at the edge and loosely laid
- Vinyl flooring, hard-wearing, easy to care for
- Winter backrests

Kitchen/bathroom

- Waste collector integrated into the entrance door
- Workplace lighting (LED)
- Oven with grill (gas)
- Bathroom lighting (LED/12 V)
- Cutlery inserts with a soft-touch surface
- Shower cubicle*
- Towel/clothes hooks and toilet paper holder
- Stove with safety pilot and automatic ignition (3-burner)
- Comfort pleated roller blind on the kitchen window
- Kitchen rear wall cladding with illuminated window cutout

- Compressor refrigerator (157 I when freezer compartment is removed), slim tower, that can be opened from both sides, with interior lighting*
- Compressor refrigerator (200 I when freezer compartment is removed), that can be opened from both sides, with interior lighting*
- Brass mixer tap
- Central washrooms* with large wall units with illuminated mirror doors, generous shelves under the sink
- Stainless steel sink with glass cover
- Flush toilet with diode level indicator and holding tank (rollable)
- Storage boxes with fold-up "Free Space" fitting and soft-close
- Washbasin with a sanitary acrylic design* including shelves, bathroom cabinet and lighted mirror
- Washroom window, hinged, made of frosted glass with blackout roller blind and roller fly screen

Water

- Mobile waste water tank (24 L)
- Fresh water (fixed tank 10 d/45 e) litres) with external filling
- Fresh water level indicator

Multimedia

- Sky TV bracket with articulated arm
- TV cabling (230 V socket)

Technology / heating / air conditioning

- Truma Combi 6 gas heaters with CP plus digital control panel with air circulation and integrated hot water boiler (10 I capacity) *
- Hot water heating and hot water floor heating (Alde) *
- Fendt-CaravanCONNECT with app control
- Central display above the entrance door
- Smoke detector
- Switch on the entrance door for the ceiling light and awning light
- Switching power supply 350 W
- Fuse box (230 V) with residual current device (safety switch)
- Spotlight(s) (LED/12 V)
- 230 V sockets
- USB-C double socket(s)

For an explanation of the symbols, see page $75\,$

DIAMANT











^{*} Certain models only

DIAMANT

New Layout New Layout 560 FD 560 SG Total length cm Total length cm 771 771 Total width cm 250 Total width cm 250 Sleeping spaces Sleeping spaces Technically permitted total mass kg 2000 **g)** Technically permitted total mass kg 2000 **g)** Mass in running order (-/+ 5%) kg c) 1616 (1535-1697) Mass in running order (-/+ 5%) kg c) 1603 (1523-1683) Optional increased perm. max. mass techn. poss. kg Optional increased perm. max. mass techn. poss. kg

560 SGW 560 DW Total length cm Total length cm 771 771 Total width cm Total width cm 250 250 Sleeping spaces Sleeping spaces Technically permitted total mass kg Technically permitted total mass kg 2000 **g)** 2000 **g)** Mass in running order (-/+ 5%) kg c) 1652 (1569-1735) Mass in running order (-/+ 5%) kg c) 1652 (1569-1735) Optional increased perm. max. mass techn. poss. kg Optional increased perm. max. mass techn. poss. kg

Layouts and dimensions

Information on vehicle weights and weight-related details on pages 70 and 71 Dimensions and weights of all model ranges and models from page 72 Explanation of the symbols on page 75



Scan QR code to watch a film about the Diamant













EXTERIOR DESIGN 2026











The standard equipment in the outdoor area

(Chassis	APERO	BIANCO	TENDENZA	DIAMANT
• "\	White" overrun device cover	•	•	•	•
• B	Black polished alloy wheels	*	*	•	•
• B	Brake AAA, self-adjusting (AL-KO)	•	•	•	•
• "\	White" drawbar cover	•	•	•	•
• E	uro axle system (AL-KO)	•	•	•	•
• L	ow-profile tyres	•	•	•	•
 A 	automatic reversing	•	•	•	•
• S	afety coupling AKS 3004 (AL-KO)	•	•	•	•
	Salvanised stable-form corner steadies	•	•	•	
• (-	Salvanised stable-form corner steadies with "Big-Foot" (AL-KO)				•
• S	hock absorber	•	•	•	•
• J	ockey wheel with load indicator	•	•	•	•
	system lightweight chassis, fully galvanised (AL-KO)	•	•	•	•
	ixtended crank supports	•	•	•	•
	pproval for 100 km/h	•	•	•	•
	Exterior body Exterior storage flap	•	•	•	•
		•	•	•	•
	Oouble-glazed, tinted hinged windows that can e operated with one hand and combined fly-screen/blackout roller blind	•	•	•	•
		_			_
	Prake lights integrated in upper position lights intrance door with integrated and insulated access, waste collector, tinted window	•	•	•	•
		•	•	•	•
	nd blackout pleated blind in the upper area of the entrance door, new look in the				
	Diamant. Apero Activ 390 FH and Bianco Activ 390 FHS shelf instead of waste collector	_			_
	Oottle crate lid with gas-pressure damper, three-point locking	•	•	•	•
	ly-screen door in the entrance area			•	•
	ront part partly with LFI technology	•	•	•	•
	Rear part partly with LFI technology				•
	wning rail with lighting on the door side				•
	Rear fog lamp(s) Skylight" panoramic roof hood with lighting (LED)	•	•	•	•
		_			•
	Vheel housings, fully insulated	•	•	•	•
	Manoeuvering handles, ergonomic and stable, at the front and rear	•	•	•	•
	Neversing lights (2 pieces)	•	•	•	•
	Sandwich construction	•	•	•	•
	wning light (LED), switched twice	•	•	•	•
	Vater tank filler cap with retaining strap	•	•	•	•
	Central locking system	•	•	•	•
• -	orced ventilation according to EN standard 1645-1	•	•	•	•



^{*} Certain models only



12-year warranty

For the imperviousness of the structural connections


This warranty is only valid in connection with the annual, fee-based inspection carried out at your authorised Fendt Caravan dealer





The variety of beds in Fendt caravan room layouts

Layouts with single beds

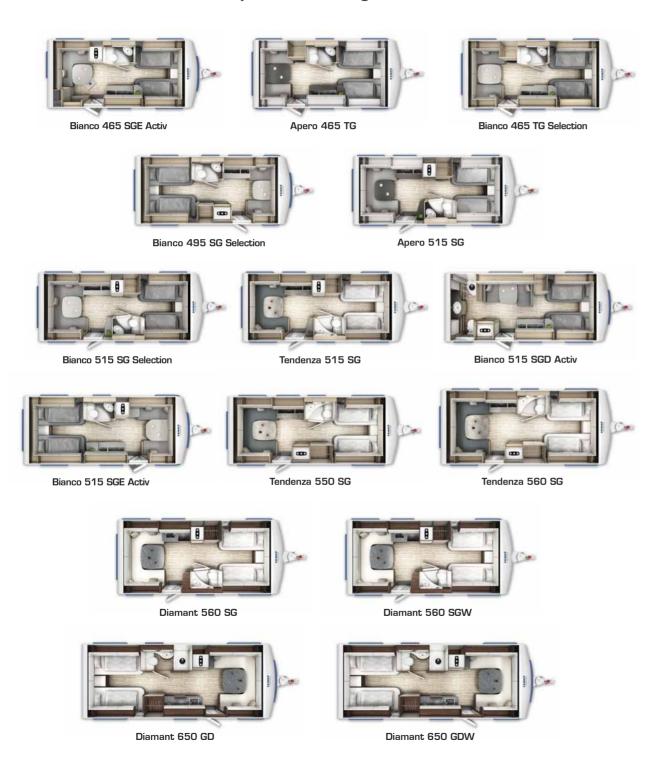

APERO • BIANCO • TENDENZA • DIAMANT

Layouts with French bed



Layouts with children's bed or bunk bed



INTERIOR DETAILS 2026

The fixtures and furnishings for feeling good
















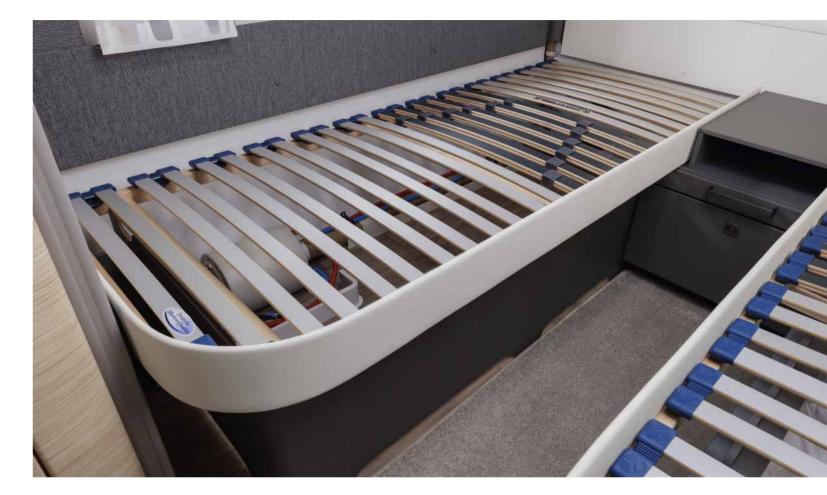











High-quality kitchen furnishings












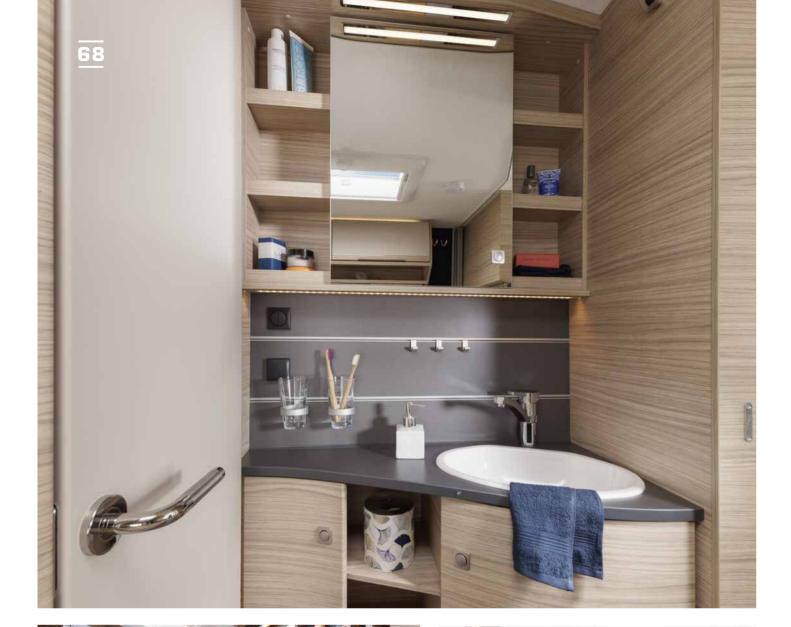

Easy-care bathroom area









70

Information on vehicle weights and weight-related details

Information on the weights and weight-related details of your Fendt caravan:

When selecting and configuring your Fendt caravan, you should take into account that each Fendt caravan is designed by the manufacturer for only one permissible maximum mass, which must not be exceeded while driving. The applicable legal provisions on caravan weights, which we have summarised for you below, result from Commission Implementing Regulation (EU) 2021/535 of 31st March 2021, which applies uniformly throughout the European Union. Please read the following information carefully before selecting and configuring your Fendt caravan. If you have any questions, please also feel free to contact your Fendt caravan dealer.

1. Technically permissible maximum laden mass

The "technically permissible maximum laden mass" refers to the maximum weight specified by the manufacturer that your Fendt caravan may have when loaded while driving. Please note that exceeding the technically permissible maximum laden mass while driving can lead to a safety risk and is punishable by fines in many European countries. We therefore recommend that you weigh your Fendt caravan before each trip and ensure that the technically permissible maximum laden mass is not exceeded. The technically permissible maximum laden mass specified by the manufacturer can be found for each layout in the technical specifications.

2. Mass in running order

The "mass in running order" is the weight of the empty caravan in its standard configuration according to the manufacturer's specifications, and includes the following items:

- The standard fittings and furnishings of the caravan according to the manufacturer's specifications
- The mass of the body and the coupling device
- The fresh water tank, 100% full, with fill level for driving (10 l)
- The water heater, 100% full
- The toilet flushing tank, 100% full
- One aluminium gas cylinder, 100% full, weighing 17 kg (fill level: 11 kg).

The mass in running order is also provided in the technical specifications for each layout.

Please note, however, that these are calculated values from the type approval procedure, which are subject to legally permissible tolerances of up to \pm 5%, which, in turn, can have a direct influence on the remaining payload and vehicle load capacity of the Fendt caravan in question (see also under 4.).

Example:

Mass in running order per the technical specifications 1,271 kg Legally permissible tolerance of \pm 5% \pm 64 kg Legally permissible range for the mass in running order 1,207 – 1,335 kg

The legally permissible range for the mass in running order is also provided in the technical specifications.

Since the legally permissible tolerances can influence the remaining payload and the vehicle load capacity of the individual Fendt caravan in question, you should consider the permissibility of such tolerances when configuring your Fendt caravan.

Example:

If the caravan from the example above has legally permissible tolerances of + 1% for the mass in running order, the latter increases from 1,271 kg to 1,284 kg, which reduces the payload and the remaining load capacity of the caravan by 13 kg.

3. The actual mass of the caravan and the standard/optional fittings and furnishings

The "actual mass" of the caravan includes the mass in running order and the optional fittings and furnishings installed at the factory.

The "standard fittings and furnishings" describes the basic configuration of a vehicle with all the legally required equipment features. This also includes all equipment parts affixed as standard. Detailed information on the standard fittings and furnishings for each layout can be found in the configurator.

The "optional fittings and furnishings" includes all equipment parts that do not form part of the standard fittings and furnishings and are attached to the caravan ex works under the responsibility of the manufacturer. However, accessories that are installed by you or a trading partner after the caravan has been delivered from the factory are not considered optional fittings and furnishings. Information on optional fittings and furnishings that can be ordered from the factory can also be found in the configurator.

It is important to note that the installation of optional fittings and furnishings always leads to a reduction in the payload and the vehicle load capacity of the caravan (see also under 4.). The maximum mass for optional fittings and furnishings that can be ordered ex works for each Fendt caravan and each layout can be found in the technical specifications (see also under 5.).

71

4. (Minimum) payload and vehicle load capacity

The "payload" of a caravan is determined by deducting the mass in running order and the mass of the optional fittings and furnishings from the technically permissible maximum laden mass. For caravans, the payload essentially corresponds to the "remaining vehicle load capacity".

Example:

Technically permissible maximum laden mass

1,500 kg

Mass in running order per the technical specifications

Mass of the selected optional fittings and furnishings

Remaining vehicle load capacity (payload)

1,271 kg

0 kg

229 kg

Please note, however, that the payload, and thus also the remaining vehicle load capacity, can be reduced accordingly on account of legally permissible tolerances in the mass in running order of up to +5% (see also under 2.).

European legislators prescribe a fixed "minimum payload" for caravans for luggage and other items that do not form part of the optional fittings and furnishings installed at the factory. This is to ensure that you can transport your personal luggage, such as clothing, toilet and kitchen equipment, food, camping equipment or toys, without thereby exceeding the technically permissible maximum laden mass.

This minimum payload is calculated for caravans as follows:

Minimum payload in $kq \ge 10*(n + L)$

n = maximum number of sleeping places and

L = vehicle body length in metres.

Example:

For a caravan with 4 sleeping places and a body length of 5.89 m, the minimum payload is 98.9 kg (10*[4+5.89]). Information on the number of sleeping places can be found for each layout in the technical specifications.

Please note that, when you configure your caravan, the legally prescribed minimum payload must not be fallen short of. If, as a result of the selection of optional fittings and furnishings, the actual vehicle mass is increased to such an extent that there is no longer enough free mass between the actual vehicle mass and the technically permissible maximum laden mass for the legally prescribed minimum payload, you must either increase the vehicle's permissible maximum mass or deselect optional fittings and furnishings in order to be able to continue the configuration and ordering process.

Make sure that the technically permissible maximum laden mass is not exceeded in the calculations by checking with your Fendt caravan dealer if necessary..

5. Maximum mass for optional fittings and furnishings

In order to ensure that the technically permissible maximum laden mass of our Fendt caravans is not exceeded by the installation of optional fittings and furnishings, taking into account the mass in running order and the legally prescribed minimum payload, we have limited the installation of optional fittings and furnishings by the manufacturer and have specified a "maximum mass for optional fittings and furnishings".

This maximum mass for optional fittings and furnishings is calculated by deducting the mass in running order and the minimum payload from the technically permissible maximum laden mass.

Since the mass in running order, as a calculated value, is subject to legally permissible tolerances of up to \pm 5%, and the occurrence of these tolerances can lead to the actual payload falling below the minimum required payload, we take account of the legally permissible tolerances in the maximum mass for optional fittings and furnishings as a precaution. Special equipment features of country variants and special models that do not form part of the standard fittings and furnishings are also taken into account.

The maximum mass for optional fittings and furnishings is shown for each layout in the technical specifications.

Example:

Technically permissible maximum laden mass	1,500 kg
Mass in running order per the technical specifications	1,271 kg
Legally permissible tolerance of + 5%	+ 64 kg
Mass in running order, taking into account the legally permissible tolerance	1,335 kg
Minimum payload	99 kg
Maximum mass for optional fittings and furnishings	66 kg
Total remaining vehicle load capacity (payload)	165 kg

APERO

APERO ACTIV

		465 SFB	465 TG	495 SFB	495 SKM	515 SG	390 FH Activ	560 SKM Activ
Total length	cm	703	703	722	722	751	603	772
Body length	cm	589	589	607	607	637	488	657
Usable length	cm	507	507	526	526	556	407	576
Total width	cm	232	232	232	232	232	232	250
max. Height	cm	266	266	266	266	266	266	266
Headroom	cm	198	198	198	198	198	198	198
Sleeping spaces		4	4	4	5	4	3	5
Bed surface at front	cm	140 x 200	2 x 85 x 200	140 x 205	140 x 208	1x85x190/1x85x200	140 x 200	160 x 200
Bed surface at rear	cm	144/141 x 210	127/115 x 210	157/132 x 210	80 x 210	136/141 x 210	106/87 x 193	75 x 192
Bed surface in middle	cm	-	-	-	96 x 179	-	-	110/117 x 200
Bunk bed surface	cm	-	-	-	72 x 202	-	-	75 x 190
Technically permitted total mass	kg	1500 g)	1500 a)	1600 a)	1600 g)	1700 g)	1500 a)	1800 a)
Mass in running the road (-/+ 5%)	kg c)	1286 (1222-1350)	1261 (1198-1324)	1354 (1286-1422)	1347 (1280-1414)	1389 (1320-1458)	1122 (1066-1178)	1481 (1407-1555)
Vehicle load capacity	kg ca.	214	239	246	253	311	378	319
Max. dimensions for opt. extras	kg	51	77	78	75	138	243	129
Optional increased perm. max. mass techn. poss.	kg	1600/1700/1800	1600/1700/1800	1700/1800/1900/2000	1700/1800/1900/2000	1800/1900/2000	1600/1700	1900/2000
		47 / 00 / 04	47 / 00 / 04	47 400 404	47 / 00 / 04	47 400 404	47 / 00 / 04	47 400 404
Floor/roof/wall thickness	mm	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31
Tyres	i)	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	205/70 R 15 C
Single/tandem axle		1	1	1	1	1	1	1
Awning circumference	cm v)	962 m) w)	962 m) w)	982 p) x)	982 p) x)	1017 n) r)	864 y)	1029 o) s)

BIANCO ACTIV

		390 FHS Activ	445 SFB Activ	465 SFH Activ	465 SGE Activ	495 SFE Activ	515 SGD Activ
Total length	cm	603	677	703	703	722	751
Body length	cm	488	562	589	589	607	637
Usable length	cm	407	481	507	507	526	556
Total width	cm	232	232	232	232	232	232
max. Height	cm	266	266	266	266	266	266
Headroom	cm	198	198	198	198	198	198
Sleeping spaces		3	4	3	2	4	3
Bed surface at front	cm	140 x 200	140 x 210	130/117 x 210	2 x 85 x 200	140/127 x 210	1x85x195/1x85x200
Bed surface at rear		106/87 x 193	137/132 x 210	140 x 200	-	140 x 200	-
Bed surface in middle	cm	-	-	-	-	-	101/87 x 190
Bunk bed surface	cm	-	-	-	-	-	-
Technically permitted total mass	kg	1500 a)	1500 g)	1600 a)	1600 a)	1700 a)	1700 g)
Mass in running the road (-/+ 5%)	-	1150 (1093-1208)	1274 (1210-1338)	1355 (1287-1423)	1342 (1275-1409)	1335 (1268-1402)	1419 (1348-1490)
Vehicle load capacity	-	350	226	245	258	365	281
Max. dimensions for opt. extras	kg	214	66	88	112	198	116
ptional increased perm. max. mass techn. poss.	kg	1600/1700	1600/1700	1700/1800	1700/1800	1800/1900/2000	1800/1900/2000
		47 / 00 / 04	47 / 00 / 04	47 / 00 / 04	47 / 00 / 04	47 400 404	47 / 00 / 04
Floor/roof/wall thickness	mm	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31
Tyres	i)	195/70 R 15 C					
Single/tandem axle		1	1	1	1	1	1
Awning circumference	cm v)	864 y)	934 z)	969 w)	969 w)	982 p) x)	1017 n) r)

BIANCO SELECTION

		465 SFB selection	465 TG Selection	495 SG Selection	515 SG Selection	515 SKM Selection	550 SKM Selection
Total length	cm	703	703	722	751	751	772
Body length	cm	589	589	607	637	637	657
Usable length	cm	507	507	526	556	556	576
Total width	cm	232	232	232	232	232	232
max. Height	cm	266	266	266	266	266	266
Headroom	cm	198	198	198	198	198	198
Sleeping spaces		4	4	4	4	5	5
Bed surface at front	cm	140 x 200	2 x 85 x 200	112/116 x 210	1x85x190/1x85x200	140 x 208	140 x 200
Bed surface at rear	cm	144/141 x 210	127/115 x 210	1x85x190/1x85x200	136/141 x 210	80 x 210	80 x 210
Bed surface in middle	cm	-	-	-	-	96 x 195	100 x 185
Bunk bed surface	cm	-	-	-	-	72 x 202	72 x 202
Technically permitted total mass	kg	1500 a)	1500 g)	1600 a)	1700 9)	1700 g)	1700 g)
Mass in running the road (-/+ 5%)	kg c)	1267 (1204-1330)	1272 (1208-1336)	1353 (1285-1421)	1393 (1323-1463)	1400 (1330-1470)	1432 (1360-1504)
Vehicle load capacity	kg ca.	233	228	247	307	300	268
Max. dimensions for opt. extras	kg	71	65	79	134	116	81
Optional increased perm. max. mass techn. poss.	kg	1600/1700/1800	1600/1700/1800	1700/1800/1900/2000	1800/1900/2000	1800/1900/2000	1800/1900/2000
		47 / 00 / 04	47 / 00 / 04	47 / 00 / 04	47 / 00 / 04	47 / 00 / 04	47 400 404
Floor/roof/wall thickness	mm	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31
Tyres	i)	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C
Single/tandem axle		1	1	1	1	1	1
Awning circumference	cm v)	962 m) w)	962 m) w)	982 p) x)	1017 n) r)	1017 n) r)	1030 s)

BIANCO ACTIV

		515 SGE Activ	515 SKF Activ	550 KMG Activ	550 SD Activ	560 SKM Activ
Total length	cm	751	751	772	772	772
Body length		637	637	657	657	657
Usable length		556	556	576	576	576
Total width	cm	232	232	232	232	250
max. Height	cm	266	266	266	266	266
Headroom	cm	198	198	198	198	198
Sleeping spaces		4	5	5	4	5
Bed surface at front	cm	144/120 x 210	140 x 210	1x85x190/1x85x200	140/120 x 210	140 x 200
Bed surface at rear	cm	2 x 85 x 200	80 x 210	80 x 210	140 x 200	75 x 192
Bed surface in middle	cm	-	96 x 210	96 x 179	-	110/117 x 200
Bunk bed surface	cm	-	72 x 202	72 x 202	-	75 x 190
Technically permitted total mass	kg	1700 g)	1700 a)	1800 a)	1700 a)	1800 a)
Mass in running the road (-/+ 5%)	_	1401 (1331-1471)	1405 (1335-1475)	1472 (1398-1546)	1452 (1379-1525)	1500 (1425-1575)
Vehicle load capacity	-	299	295	328	248	300
Max. dimensions for opt. extras	kg	125	111	139	70	109
Optional increased perm. max. mass techn. poss.	kg	1800/1900/2000	1800/1900/2000	1900/2000	1800/1900/2000	1900/2000
Floor/roof/wall thickness	mm	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31
Tyres	i)	195/70 R 15 C	195/70 R 15 C	205/70 R 15 C	195/70 R 15 C	205/70 R 15 C
Single/tandem axle		1	1	1	1	1
Awning circumference	cm v)	1017 n) r)	1017 n) r)	1030 s)	1030 s)	1029 o) s)

Layouts and dimensions

Information on vehicle weights and weight-related details on pages 70 and 71 For an explanation of the symbols, see page 75

TENDENZA

		465 SFB	515 SG	550 SG	560 SFDW	560 SG	650 SFD
Total length	cm	703	751	772	772	772	855
Body length	cm	589	637	657	657	657	741
Usable length	cm	507	556	576	576	576	659
Total width	cm	232	232	232	250	250	250
max. Height	cm	266	266	266	266	266	265
Headroom	cm	198	198	198	198	198	198
Sleeping spaces		4	4	4	4	4	4
Bed surface at front	cm	140 x 200	1x85x190/1x85x200	1x85x210/1x85x200	142/121 x 224	1x90x210/1x90x200	162/151 x 230
Bed surface at rear	cm	144/142 x 210	137/142 x 210	152/142 x 210	150 x 190	152/142 x 230	-
Bed surface in middle	cm	-	-	-	-	-	190 x 150
Bunk bed surface	cm	-	-	-	-	-	-
Technically permitted total mass	kg	1500 g)	1700 g)	1700 g)	1800 a)	1800 g)	2000 a)
Mass in running the road (-/+ 5%)	kg c)	1307 (1242-1372)	1438 (1366-1510)	1444 (1372-1516)	1558 (1480-1636)	1517 (1441-1593)	1750 (1663-1838)
Vehicle load capacity	kg ca.	193	262	256	242	283	250
Max. dimensions for opt. extras	kg	29	86	78	58	101	48
Optional increased perm. max. mass techn. poss.	kg	1600/1700/1800	1800/1900/2000	1800/1900/2000	1900/2000	1900/2000	2200/2400/2500/2800
Floor/roof/wall thickness	mm	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31
Tyres	i)	195/70 R 15 C	195/70 R 15 C	195/70 R 15 C	205/70 R 15 C	205/70 R 15 C	185/65 R 15
Single/tandem axle		1	1	1	1	1	2
Awning circumference	cm v)	962 m) w)	1017 n) r)	1030 s)	1034 s)	1034 s)	1119 u) t)

DIAMANT

		560 FD	560 SG	650 GD	560 DW	560 SGW	650 GDW
Total length	cm	771	771	860	771	771	860
Body length	cm	656	656	746	656	656	746
Usable length	cm	563	563	654	563	563	654
Total width	cm	250	250	250	250	250	250
max. Height	cm	266	266	265	266	266	265
Headroom	cm	198	198	198	198	198	198
Sleeping spaces		4	4	4	4	4	4
Bed surface at front	cm	144/116 x 224	2 x 90 x 200	182/156 x 224	144/116 x 224	2 x 90 x 200	182/156 x 224
Bed surface at rear	cm	155 x 195	142/144 x 224	2 x 90 x 205	155 x 195	142/144 x 224	2 x 90 x 205
Bed surface in middle	cm	-	-	-	-	-	-
Bunk bed surface	cm	-	-	-	-	-	-
Technically permitted total mass	kg	2000 a)	2000 a)	2200 g)	2000 a)	2000 a)	2200 g)
Mass in running the road (-/+ 5%)	kg c)	1603 (1523-1683)	1616 (1535-1697)	1853 (1760-1946)	1652 (1569-1735)	1652 (1569-1735)	1903 (1808-1998)
Vehicle load capacity	kg ca.	397	384	347	348	348	297
Max. dimensions for opt. extras	kg	211	198	140	160	160	87
otional increased perm. max. mass techn. poss.	kg	-	-	2400/2500/2800	-	-	2400/2500/2800
Floor/roof/wall thickness	mm	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31	47 / 39 / 31
Tyres	i)	215/70 R 15 C	215/70 R 15 C	195/65 R 15	215/70 R 15 C	215/70 R 15 C	195/65 R 15
Single/tandem axle		1	1	2	1	1	2
Awning circumference	cm v)	1027	1027	1116 v)	1027	1027	1116 v)

Legend:

a) 100% filled aluminium gas cylinder (11 kg), fresh water tank with 10-litre "when-driving" fill level, 100% filled toilet flushing tank, 100% filled water heater

- b) The dead weight reflects the vehicle weight with standard fittings without water, gas or other accessories
- c) The "mass in running order" is the weight of the empty caravan in its standard configuration according to the manufacturer's specifications, and includes the following items:
- The standard fittings and furnishings of the caravan according to the manufacturer's specifications
- The mass of the body and the coupling device
- The fresh water tank, 100% full, with fill level for driving (10 l)
- The water heater, 100% full
- The toilet flushing tank, 100% full
- One aluminium gas cylinder, 100% full, weighing 17 kg (fill level: 11 kg).

The mass in running order is also provided in the technical specifications for each layout.

Please note, however, that these are calculated values from the type approval procedure, which are subject to legally permissible tolerances of up to \pm 5%, which, in turn, can have a direct influence on the remaining payload and vehicle load capacity of the Fendt caravan in question

- d) Fresh water tank capacity within the meaning of Annex V, part A, no.2.6 fn (h) of Regulation (EU) 1230/2012, taking into account the movement limitation (discharge nozzle on the fresh water tank) 10 l ("when driving" fill level)
- e) Capacity of the fresh water tank max. 25 litres or 45 litres, taking into account the discharge nozzle on the fresh water tank
- q) Additional weight variants are possible by installing a new chassis your Fendt Caravan dealer will be happy to provide you with information
- i) Alternative tyre sizes are permitted to the manufacturer
- m) For weight variant 1600/1700 kg: awning circumference 969 cm
- n) For weight variant 1800 kg: awning circumference 1015 cm
- o) For weight variant 1800 kg: awning circumference 1034 cm
- p) For weight variant 1900/2000 kg: awning circumference 987 cm
- r) For weight variant 1900/2000 kg: awning circumference 1019 cm
- s) For weight variant 1900/2000 kg: awning circumference 1039 cm
- t) For weight variant 2800 kg: awning circumference 1124 cm
- u) For weight variant 2200/2400/2500 kg: awning circumference 1126 cm

75

- v) For weight variant 2800 kg: awning circumference 1124 cm
- w) For weight variant 1800 kg: awning circumference 966 cm
- x) For weight variant 1800 kg: awning circumference 985 cm
- y) For weight variant 1600/1700 kg: awning circumference 866 cm
- z) For weight variant 1600/1700 kg: awning circumference 940 cm

Important information:

The catalogue and the price list reflect the status of the series at the time of printing. Despite the contents having been checked, printing errors cannot be ruled out. Over the course of the model year, we reserve the right to make changes to the equipment and fittings and product improvements. Differences in colour due to printing and photography cannot be completely ruled out.

The models depicted in the catalogue and in the price list sometimes contain special fittings or decorations that are not part of the standard scope of delivery. Where weights are specified, deviations of up to +/- 5 percent are possible due to the processing of natural materials. When accessories are installed, the mass in running order is increased.

Attachments to the vehicle may influence the drawbar load. All dimensions are non-binding and may be subject to minor changes.

Information on masses and weights is given in accordance with Regulation (EU) 1230/2012, unless otherwise specified in the catalogue, including technical specifications and price list.

Caution: Axle and drawbar loads must be observed, and the technically permissible overall mass be adhered to. Adherence to the permissible masses and loads is to be ensured by distributing the load throughout the vehicle.

Fittings and equipment may influence the payload or vehicle load capacity by increasing/decreasing the dead weight. It should be noted that this can reduce the vehicle load capacity, depending on the fittings and equipment. The vehicle load capacity corresponds to the difference between the technically permissible total mass and the mass in running order. This value must take into account the masses for special accessories and personal equipment.

The technically permissible total mass in the loaded state must never be exceeded. Please ask your Fendt Caravan dealer if necessary.

The specification of this circumference may not be sufficient to select the appropriate awning, under certain circumstances.

The specified circumference only applies to awnings that are fully drawn into the existing keder strip of the caravan.

The circumference may vary due to special equipment, tire size and load.

We recommend measuring the caravan individually in each case in order to determine an exact circumference appropriate for the type of awning.

We reserve the right to make changes to prices, constructional details and fittings.



+++ 12-year warranty on the imperviousness of the body connections: this warranty is only valid in connection with the annual, fee-based inspection carried out at your authorised Fendt Caravan dealer +++ Certified to ISO 9001:2015 +++ Environmental management certification according to ISO 14001:2015 + ++ Metallic paintwork +++ 47 mm floor thickness for optimal insulation values +++ Drain cocks for convenient emptying of the water pipes +++ Solid, screwed connections +++ Two-part sidewall panel +++ Sturdy furniture made of multi-glued plywood +++ Extra robust hinges, positioners and locks +++ 2-pole residual current device/safety switch with 30mA

www.fendt-caravan.com (Find us on Facebook, Instagram, YouTube)